


Glass lined columns in flanged sections

- Design: pressure: - 1 to bar + 6 bar (higher pressures upon request).
- Design temperature: - 25°C to + 200°C.
- Construction according to PED Directive 97/23/CE.
- Construction tolerance per DIN 28007 T2 (upon request also half DIN).
- Glass lined nozzles with split loose flanges.
- PTFE envelope gasket on all assembled joints.
- Glass without plugs, tested to DIN 28063.
- Support by lugs or skirt.
- Glass lined ring for internals support.
- Main flange with split loose flanges up to 300 mm diameter, on larger sizes clamped execution.



Nominal size	Lma x mm	Lfma x mm
DN 200	3.000	400
DN 250	3.000	400
DN 300	3.000	500
DN 350	3.000	500
DN 400	3.000	750
DN 450	3.000	750
DN 500	3.000	1.000
DN 600	4.000	1.500
DN 800	4.000	2.000
DN 1.000	4.000	2.000
DN 1.200	4.000	2.000
DN 1.400	4.000	2.000
DN 1.600	4.000	2.000
DN 1.800	4.000	2.000
DN 2.000	4.000	2.000

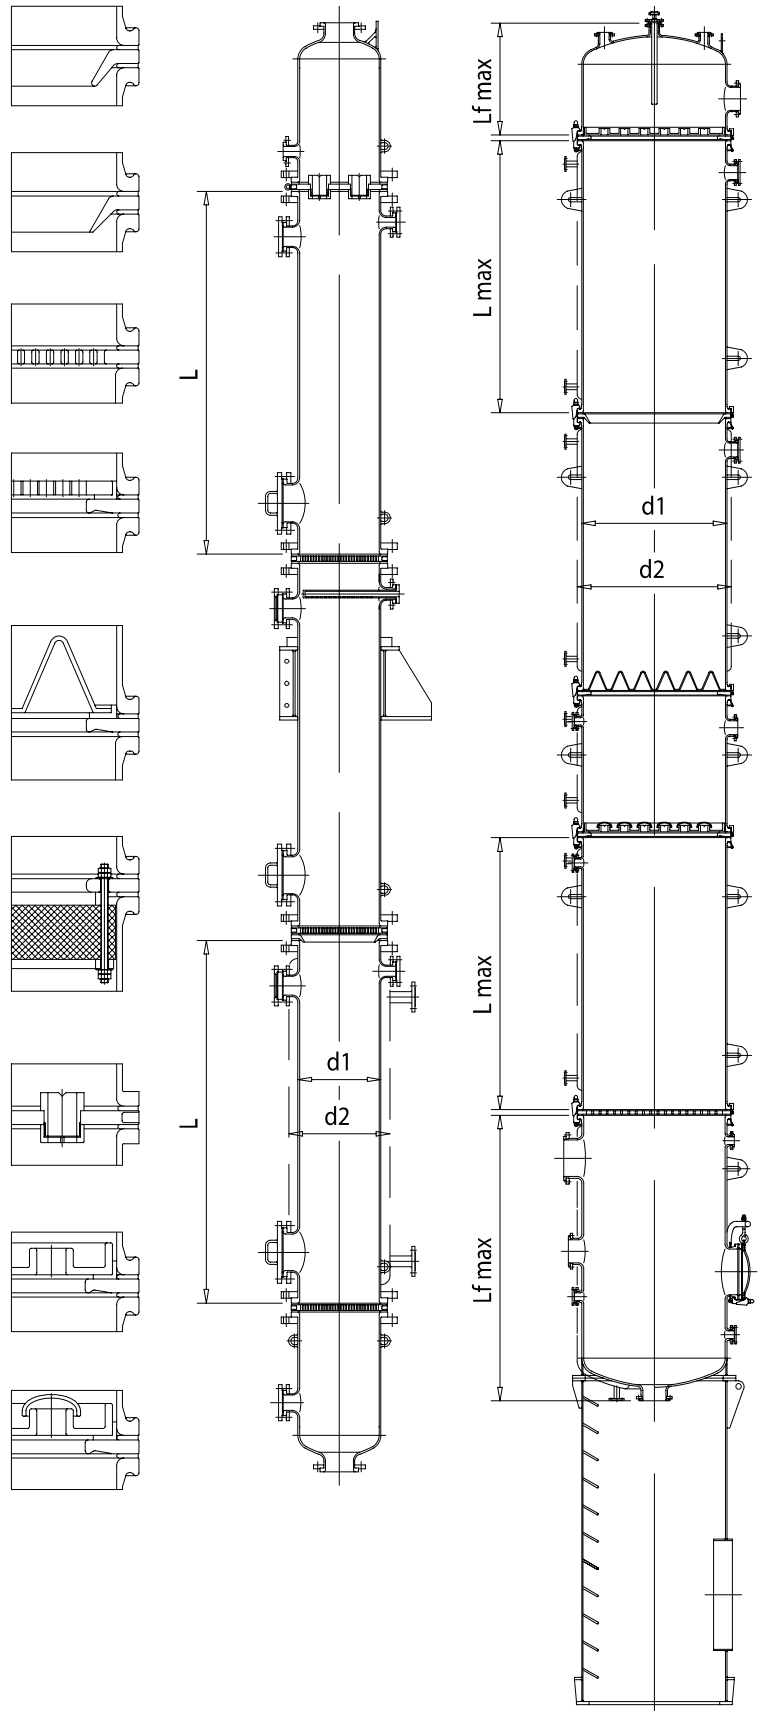